


Beam Clamp



FEATURES

1. Robust all steel construction with safety operation.
2. Compact size with light weight.
3. Easy to install with minimum headroom.
4. Super-quick adjustment to any girder width in range.
5. Beam clamp with small shackle is available upon request.

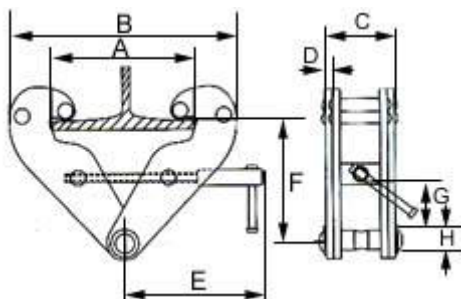


Model		BC010	BC020	BC030	BC050	BC100
Capacity		1T	2T	3T	5T	10T
Test Load KN		19.6	39.2	58.8	98	196
Flange Width mm		75-220	75-220	80-320	80-320	90-320
Dimensions(mm)	Max.A	260	260	354	354	365
	Min.B	180	180	235	235	320
	Max.B	360	360	490	490	505
	C	64	74	103	110	120
	D	5	6	8	10	12
	E	215	215	260	260	280
	Max.F	155	155	225	225	235
	Min.F	102	102	140	140	170
	Min.G	25	25	45	45	50
	H	22	22	24	28	40
Net Weight kg		4.5	5	10.5	11	16

Beam Clamp with big shackle

	Model	BCS010	BCS020	BCS030	BCS050	BCS100
	Capacity	1T	2T	3T	5T	10T
	Test Load Kn	12.3	24.5	36.8	61.3	122.6
	I-beam Width Range mm	75-215	75-215	80-320	90-320	90-320
	Net Weight kg	5	6.5	12.8	17.3	28

Rigging anchor point
(vertical and horizontal)

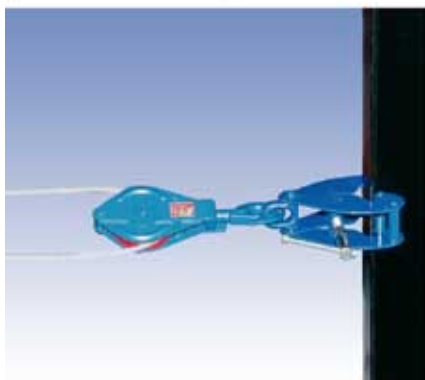


Hoisting point




Test lifting



Vertical Lifting Clamp, LC Type

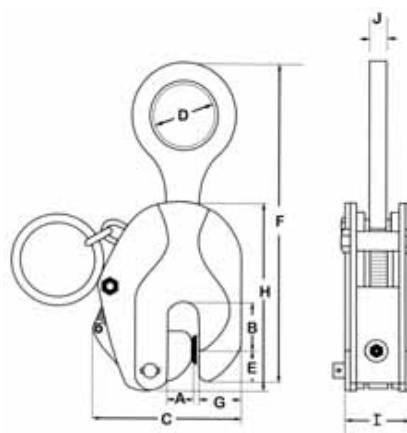

Model	Capacity (KG)	Test Load (KN)	Jaw Opening (mm)	A	B	C	D	E	F	G	H	I	J	N.W./kg
LC010	1000	19.6	0-22	24	36	155	50	24	220-260	30	156	52	14	3.6
LC020	2000	39.2	0-30	35	45	155	60	30	250-295	38	190	60	18	6.0
LC030	3000	58.8	0-35	40	50	176	60	35	296-360	40	226	68	20	9.2
LC050	5000	98	5-45	50	58	218	65	42	350-420	60	270	78	22	16.5

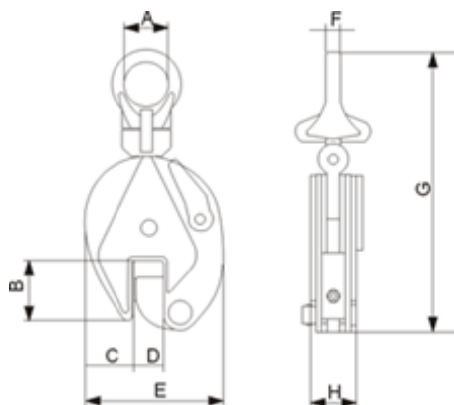Universal Lifting Clamp, ULC Type


Model	Capacity(KG)	Test Load(KN)	Max. Jaw Opening(mm)	A	B	C	D	E	F	G	H	N.W./kg
ULC005	500	9.8	15	30	43	34.5	0-17	103	10	212	36	2
ULC010	1000	19.6	20	48	63	51	0-22	138	12	294	50	4.8
ULC020	2000	39.2	25	68	76	59	0-27	164	16	370	52	6.5
ULC030	3000	58.8	30	74	85	56	0-32	193	20	418	78	15
ULC050	5000	98	50	80	90	65	0-52	240	22	450	88	23

HLB Series Horizontal Lifter


Model	Capacity (kg)	Test Load (kg)	Opening Size (mm)	Net Weight
HLB-0.8	400	800	0-25	2.5
HLB-1.0	500	1000	0-30	3.5
HLB-1.5	800	1500	0-30	4.0
HLB-2.0	1000	2000	0-40	5.0
HLB-3.2	1600	3200	0-45	6.0
HLB-4.0	2000	4000	0-50	6.5
HLB-5.0	2500	5000	0-55	7.5
HLB-6.0	3000	6000	25-130	22
HLB-8.0	4000	8000	0-100	25
HLB-10	5000	10000	0-125	33

LA Series Horizontal Lifter (DHQA Model)

	Model	Capacity (kg)	Test Load (kg)	Opening Size (mm)	Net Weight (kg)
	LA-2.0	1000	2000	0-50	5.5
	LA-3.2	1600	3200	0-60	8.0
	LA-5.0	2500	5000	10-80	11.5
	LA-6.0	3000	6000	10-100	14.5

Horizontal Lifting Clamp, HLA Type



MODEL	CAPACITY/KG	OPENING SIZE/MM	TEST LOAD/KG	NET WEIGHT/KG
HLA-1.0	1000	3-18	2000	2
HLA-2.0	2000	3-22	4000	4.4

Horizontal Lifting Clamp, HLC Type




Model	Capacity (Kg)		Test Load (KN)		Max. Jaw Opening(mm)	N.W./kg	
	single	double	single	double		single	double
HLC-075	750	1500	14.7	29.4	50	4.3	8.6
HLC-150	1500	3000	29.4	58.8	50	7.7	15.4
HLC-250	2500	5000	49	98	60	14.1	28.2

QD Oil Drum Clamps

	Model	Capacity	Test Load	Opening size	Net Weight
		(kg)	(kg)	(mm)	(kg)
	QD-0.2	200	200	2-10	1.3



MULTI STEEL PLATE LIFTING CLAMPS(PLK)

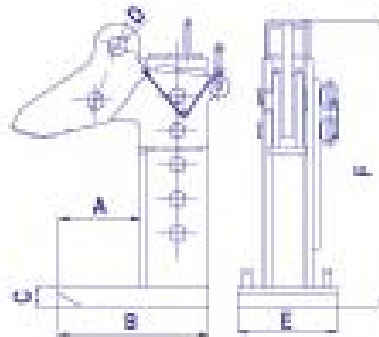

Model	Capacity (Kg)		Max. Jaw Opening(mm)	N.W./kg	
	single	double		single	double
PLK-3T	1500	3000	20-160	20	40
PLK-5T	2500	5000	40-240	29	58
PLK-8T	4000	8000	40-240	50	100
PLK-15T	7500	15000	40-240	72	144


Lateral Lifting Clamp L Type



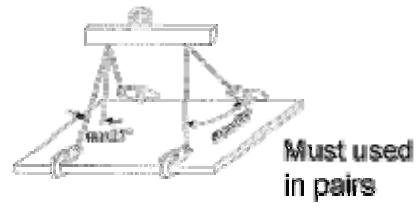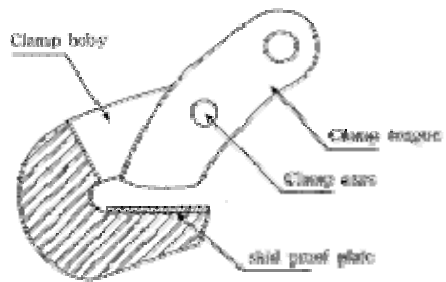

ITEM NO		01881	01882	01883	01884	01885
Capacity	kg	750	1500	2500	3000	5000
TEST LOAD	kg	1500	3000	5000	6000	10000
JAW OPEN	mm	0-15	0-25	25-50	0-40	50-80
SIZE mm	A	95	148	178	195	220
	B	160	250	310	310	310
	C	32	48	55	62	68

OIL DRUM CLAMP

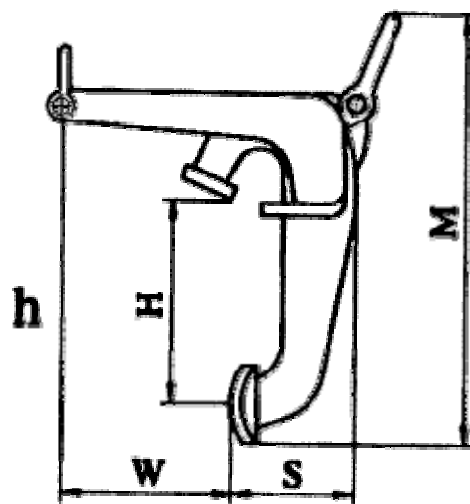



ITEM NO		01875
WORKING LOAD	kg	600
OPENING SIZE	mm	0-30
DIMENSIONS (mm)	H	350
	h	420
	M	570
	S	105
	W	260

Model PLT – Pipe Tongs

Model PLT – Pipe Tongs

- Sturdy construction to handle pipe, round bars, castings, etc.
- Curved gripping arms for a positive grip on all types of material.
- Load must be balanced and controlled when lifting.
- Padded tongs can be furnished on request to protect smooth or polished surfaces.
- May be used in pairs with a lifting beam for added stability.



SPECIFICATIONS - Fixed Diameter

Model Number	Rated Capacity (lbs)	Dia. (in)	Headroom (in)	Wt. (lbs)
108-1/2	1000	5"	15-1/2	17
108-1	2000	8"	23-1/2	25

SPECIFICATIONS - Adjustable Diameter


Model Number	Rated Capacity (lbs)	Dia. (in)	Headroom (in)	Wt. (lbs)
108-1/4-2/4	500	2" - 4"	13.46 - 11.78	6
108-1/2-4/8	1000	4" - 8"	21.06 - 18.70	18
108-1/2-7/12	1000	7" - 12"	39.71 - 34.40	42
108-1/2-10/15	1000	10" - 15"	37 - 33.63	72




C TYPE CLAMP

● C TYPE CLAMP


- Application: it is used to lift steel roll horizontally.
- Wll range: 3~22T
- Safety factor: 3:1
- Atyre used to lift 3.2 T,btype used to lift >3.2T.

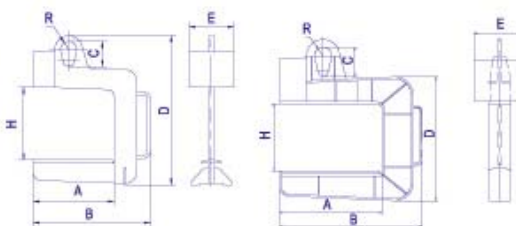

T	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
Weight	Width	Thickness	A	B	C	D	E	H	R	Weight
3.2	≤300	≥400	300	590	155	845	250	430	50	85
3.2	350-500	≥400	500	725	155	924	250	450	50	130
5	750-900	≥400	900	1225	200	1144	324	500	60	350
5	900-1100	≥500	1100	1450	200	1331	318	600	60	420
5	1100-1300	≥500	1300	1670	200	1332	375	600	60	530
10	750-900	≥500	900	1290	300	1555	435	650	90	570
10	900-1120	≥500	1120	1555	300	1767	477	850	90	790
10	1100-1300	≥500	1300	1758	300	1722	478	750	90	795
10	1300-1500	≥500	1500	1955	300	1854	467	850	90	1120
16	900-1100	≥600	1100	1540	310	1850	594	850	90	1140
16	1100-1250	≥600	1250	1710	310	1871	533	850	90	1250
25	900-1100	≥600	1100	1570	370	1982	633	860	110	1800
25	1100-1300	≥700	1300	1810	370	2058	716	860	110	2130
32	1400-1660	≥700	1660	2240	550	2450	700	850	130	2950

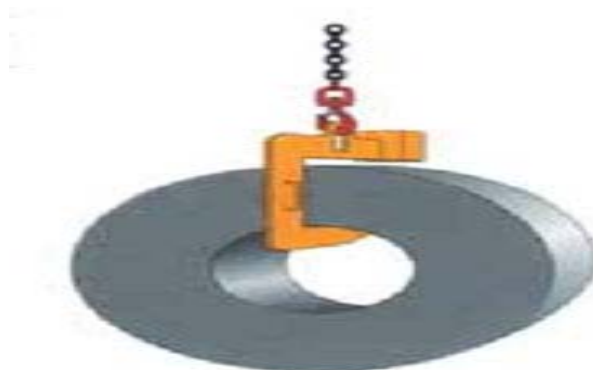

Screw Clamp-----pld Type

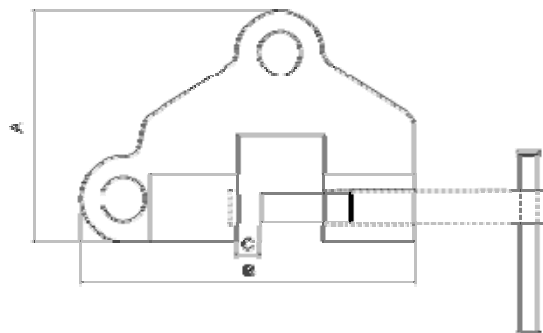

ITEM NO		01776	01777
WORKING LOAD	kg	2000	2000
TEST LOAD	kg	4000	4000
OPEN SIZE	mm	0-40	0-100
SIZE mm	A	130	155
	B	200	230
	C	0-40	0-100


HIGH ACCURACY CRANE SCALE

Item	Capacity (kg)	Division (kg)	Number (n)	N.W. (kg)
HACS-1-A/B	1000	0.5	2000	12
HACS-2-A/B	2000	1	2000	14
HACS-3-A/B	3000	1	3000	14
HACS-5-A/B	5000	2	2500	24
HACS-10-A/B	10000	5	2000	44
HACS-15-A/B	15000	5	3000	60
HACS-20-A/B	20000	10	2000	60


DRUM LIFTER

Item: DL-1

CAPACITY: 1 TON

CHAIN SIZE: 6 X 18MM

LENGTH OF CHAIN: 500MM

NET WEIGHT: 3.6KG